


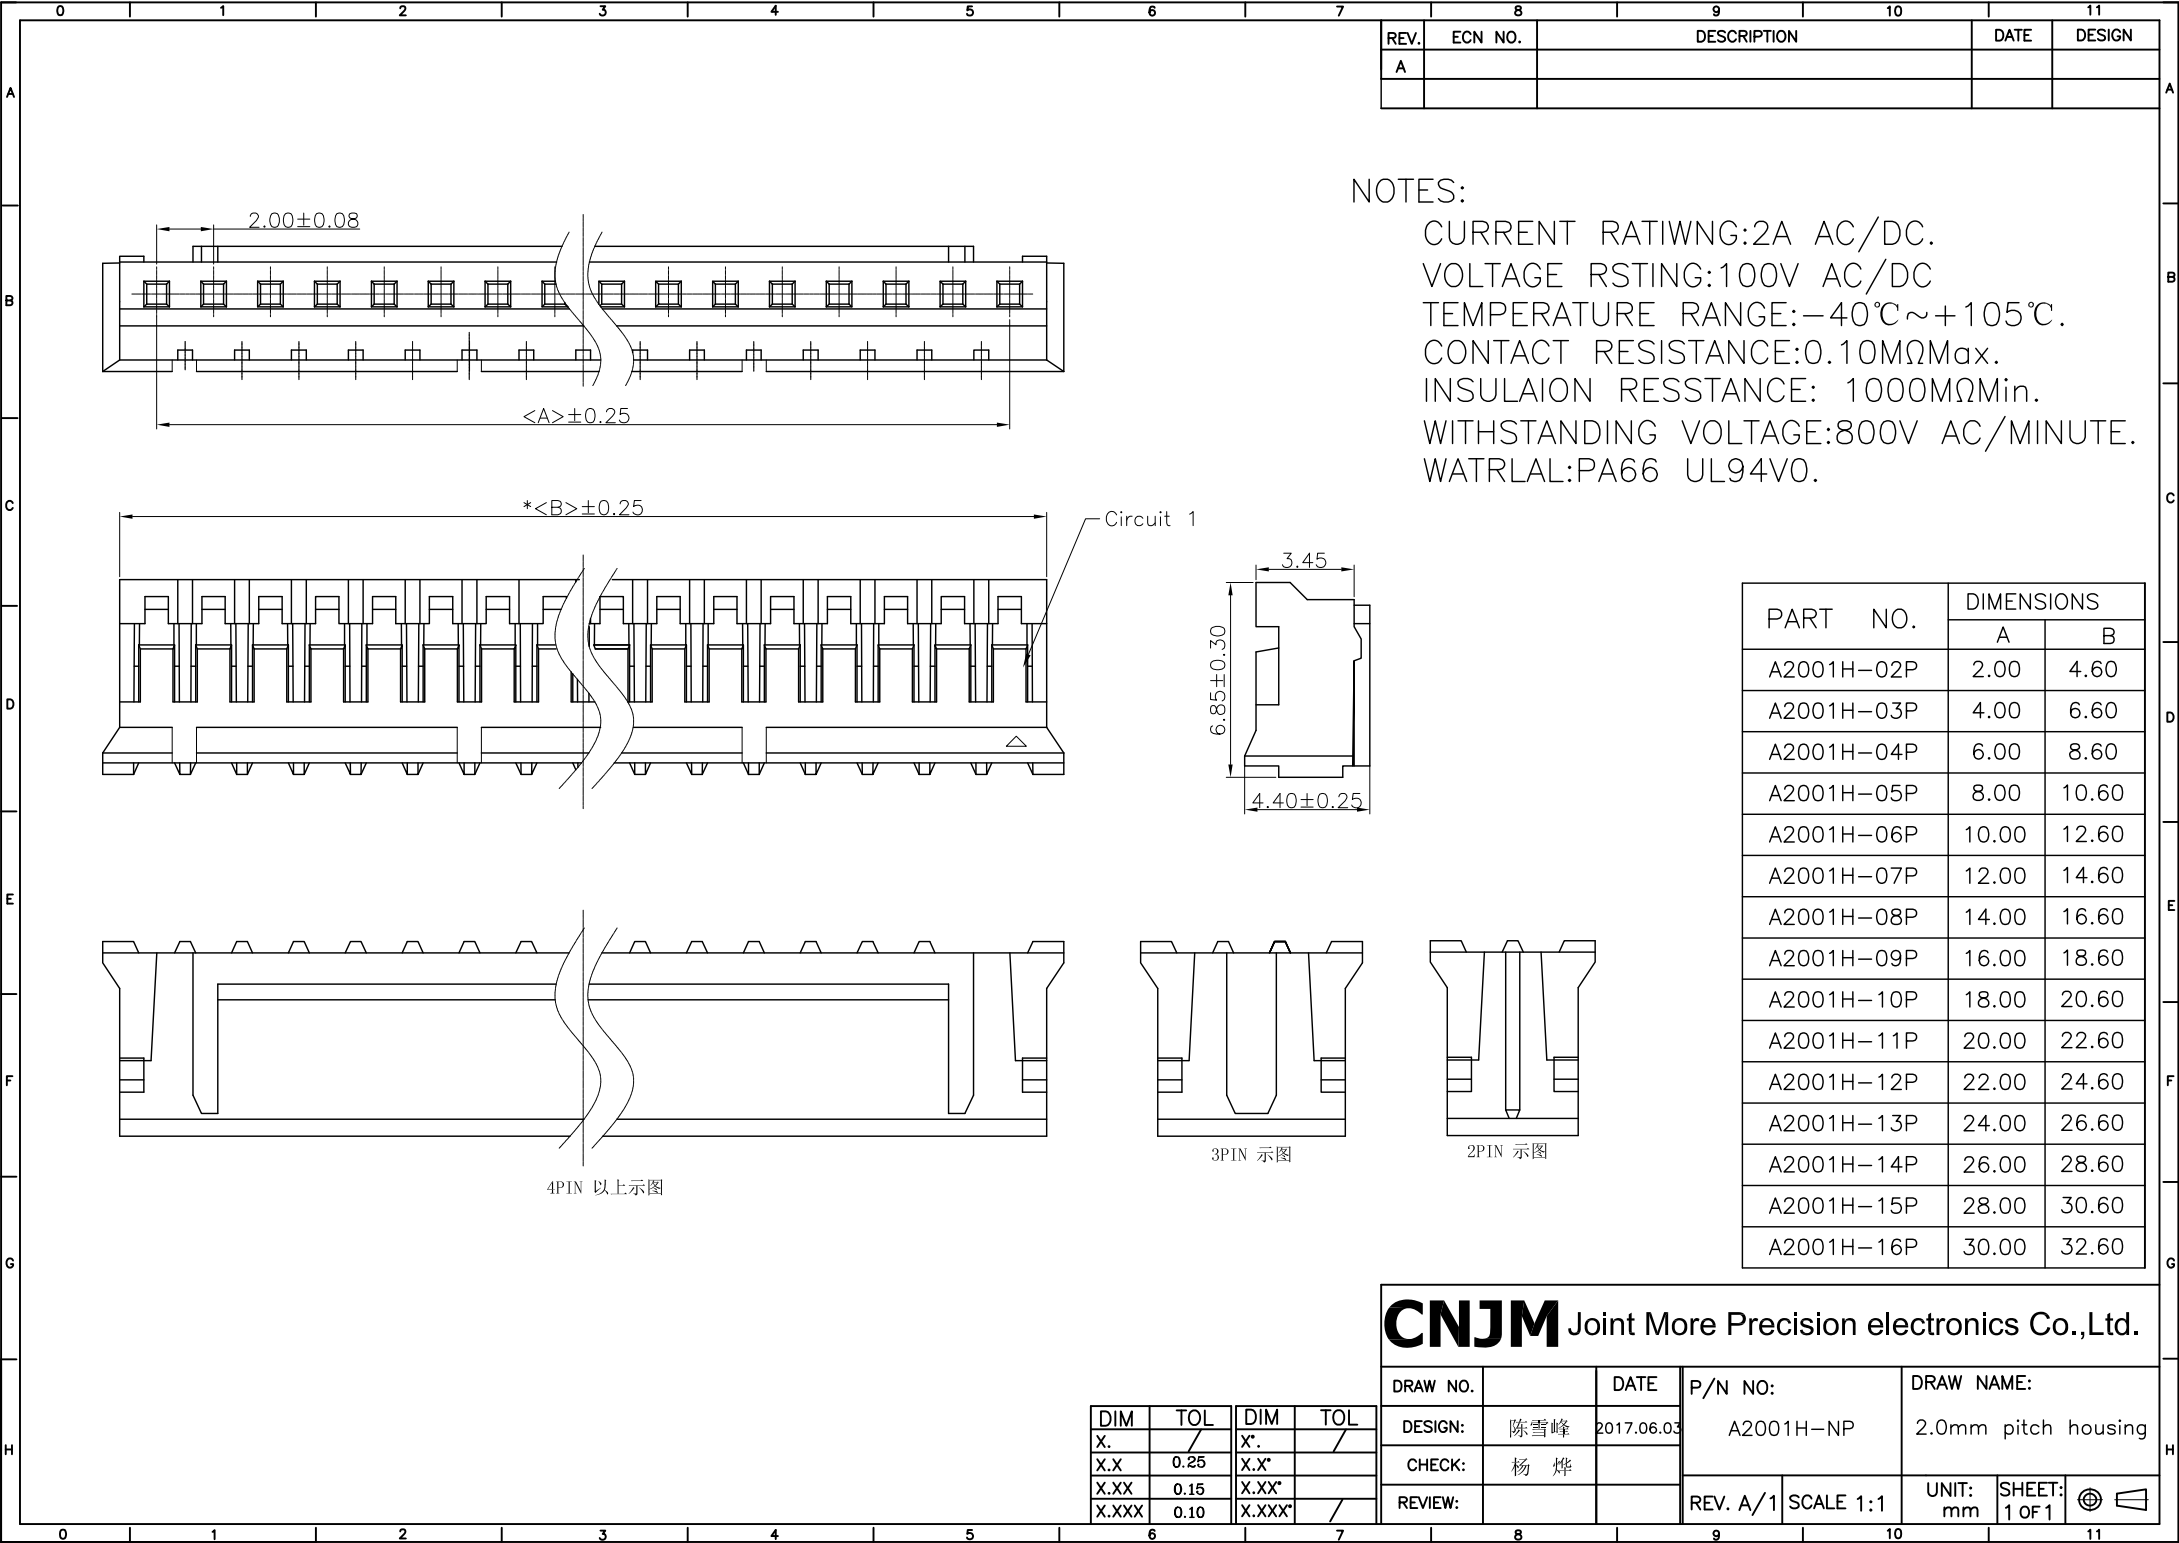


REV.	ECN NO.	DESCRIPTION	DATE	DESIGN
A				

NOTES:
CURRENT RATING:2A AC/DC.
VOLTAGE RATING:100V AC/DC
TEMPERATURE RANGE:−40℃~+105℃.
CONTACT RESISTANCE:0.10MΩMax.
INSULATION RESISTANCE: 1000MΩMin.
WITHSTANDING VOLTAGE:800V AC/MINUTE.
MATERIAL:PA66 UL94V0.

PART NO.	DIMENSIONS	
	A	B
A2001H-02P	2.00	4.60
A2001H-03P	4.00	6.60
A2001H-04P	6.00	8.60
A2001H-05P	8.00	10.60
A2001H-06P	10.00	12.60
A2001H-07P	12.00	14.60
A2001H-08P	14.00	16.60
A2001H-09P	16.00	18.60
A2001H-10P	18.00	20.60
A2001H-11P	20.00	22.60
A2001H-12P	22.00	24.60
A2001H-13P	24.00	26.60
A2001H-14P	26.00	28.60
A2001H-15P	28.00	30.60
A2001H-16P	30.00	32.60

CNJM Joint More Precision electronics Co.,Ltd.					
DRAW NO.		DATE	P/N NO:	DRAW NAME:	
DESIGN:	陈雪峰	2017.06.03	A2001H-NP	2.0mm pitch housing	
CHECK:	杨 烨				
REVIEW:			REV. A/1	SCALE 1:1	UNIT: mm
				SHEET: 1 of 1	⊕ ◁

DIM	TOL	DIM	TOL
X.	/	X.	/
X.X	0.25	X.X*	/
X.XX	0.15	X.XX*	/
X.XXX	0.10	X.XXX*	/

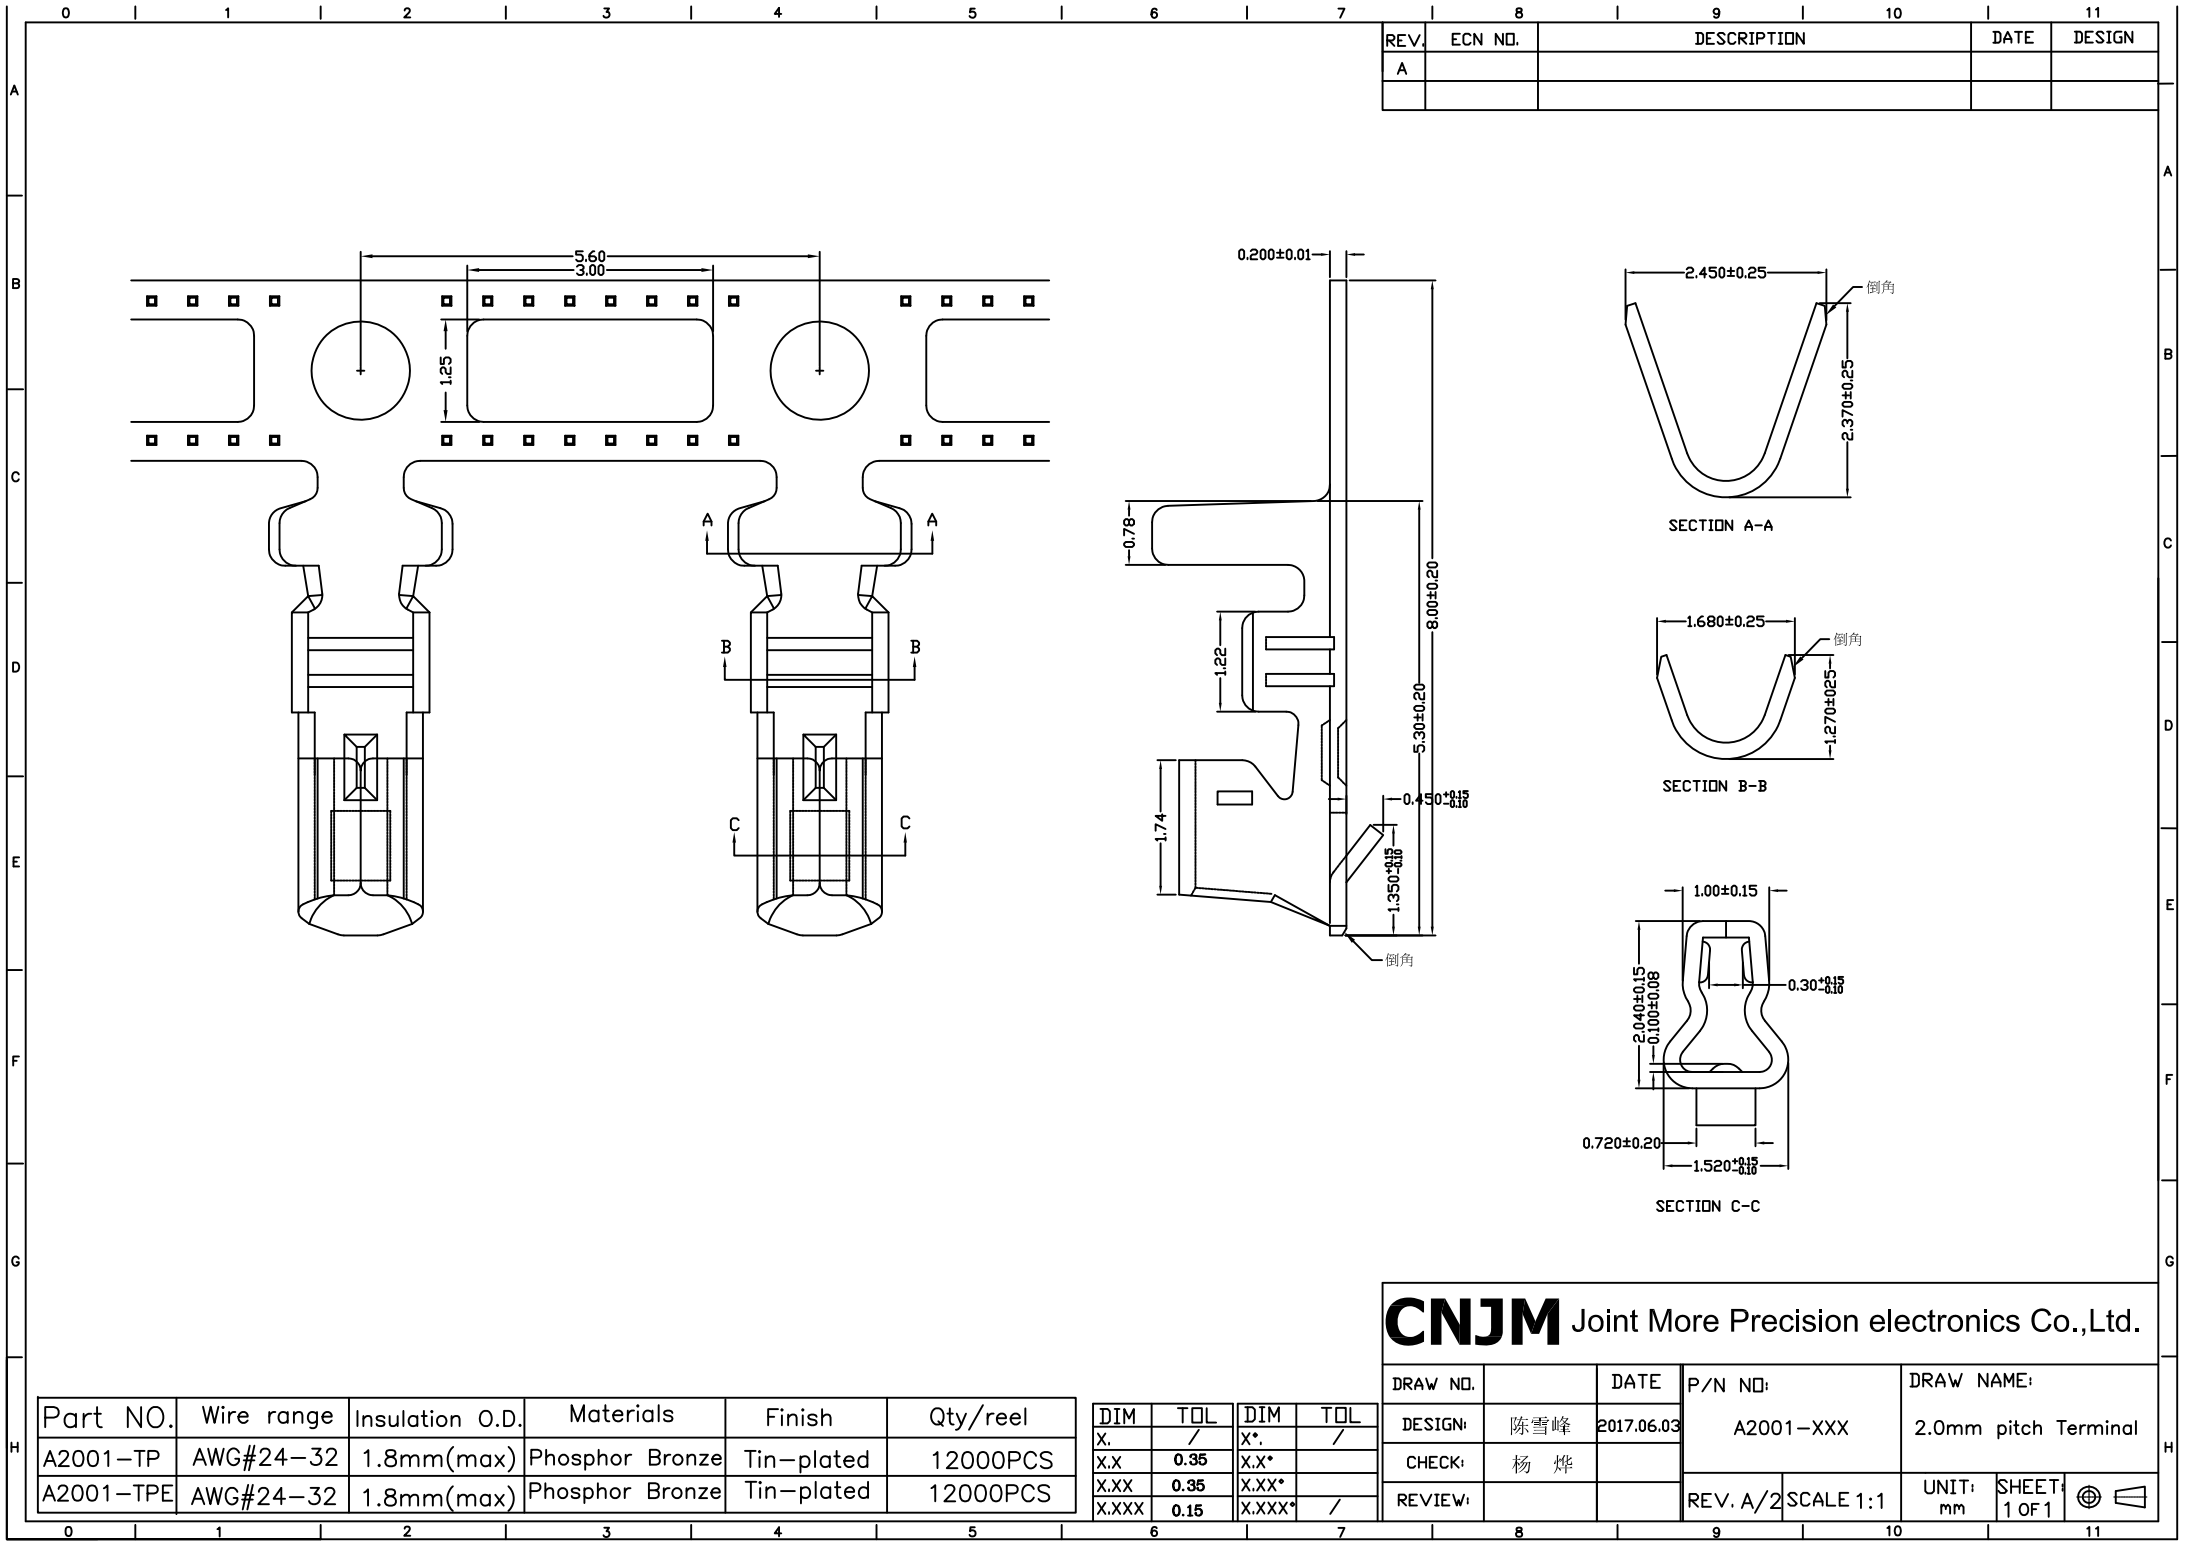

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN
A				



Specifications:
Current rating:2A AC/DC.
Voltage rating:100V AC/DC
Temperature range:−40°C~+105°C.
Contact resistance:10MΩ Max.
Insulation resistance:1000MΩ Min.
Withstanding voltage: 800V AC/minute.
Material:PA66.UL94V−0.


Ordering Informaiton&Dimensions:


PART NO.	Dimensions	
	A	B
A2001WR−02P	2.00	6.00
A2001WR−03P	4.00	8.00
A2001WR−04P	6.00	10.00
A2001WR−05P	8.00	12.00
A2001WR−06P	10.00	14.00
A2001WR−07P	12.00	16.00
A2001WR−08P	14.00	18.00
A2001WR−09P	16.00	20.00
A2001WR−10P	18.00	22.00
A2001WR−11P	20.00	24.00
A2001WR−12P	22.00	26.00
A2001WR−13P	24.00	28.00
A2001WR−14P	26.00	30.00
A2001WR−15P	28.00	32.00
A2001WR−16P	30.00	34.00

CNJM Joint More Precision electronics Co.,Ltd.					
DRAW NO.		DATE	P/N NO:		DRAW NAME:
DESIGN:		陈雪峰	201706.03		A2001WR−NP
CHECK:		杨 烨			2.0mm pitch 90° wafer
REVIEW:					
			REV. A/1	SCALE 1:1	UNIT: mm
				SHEET: 1 OF 1	

DIM	TOL	DIM	TOL
X.	/	X".	/
X.X	0.25	X.X"	
X.XX	0.15	X.XX"	
X.XXX	0.10	X.XXX"	/

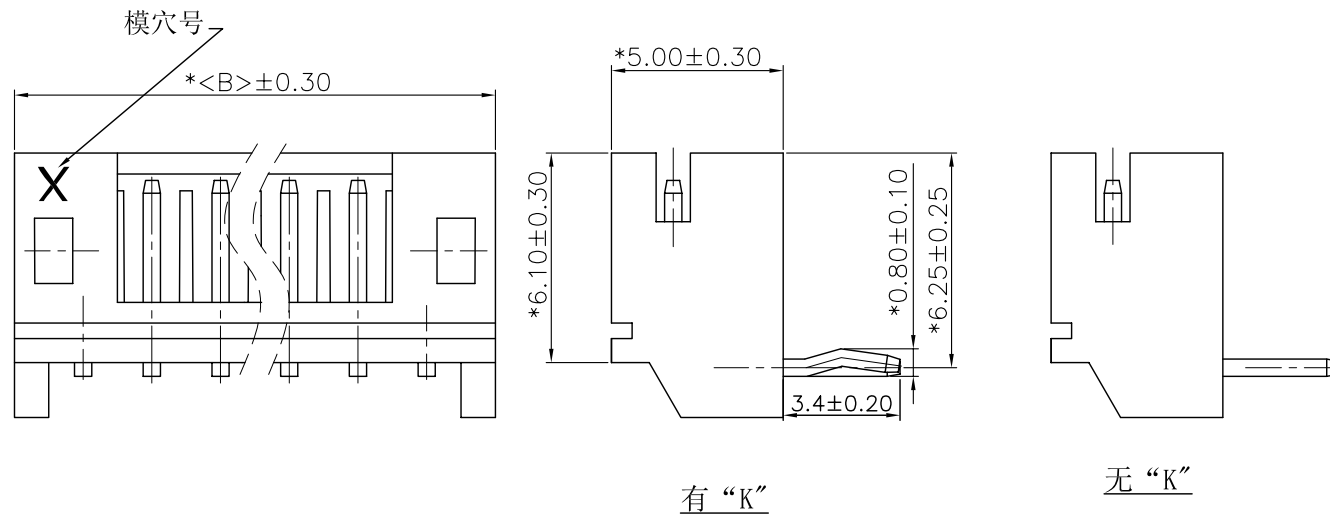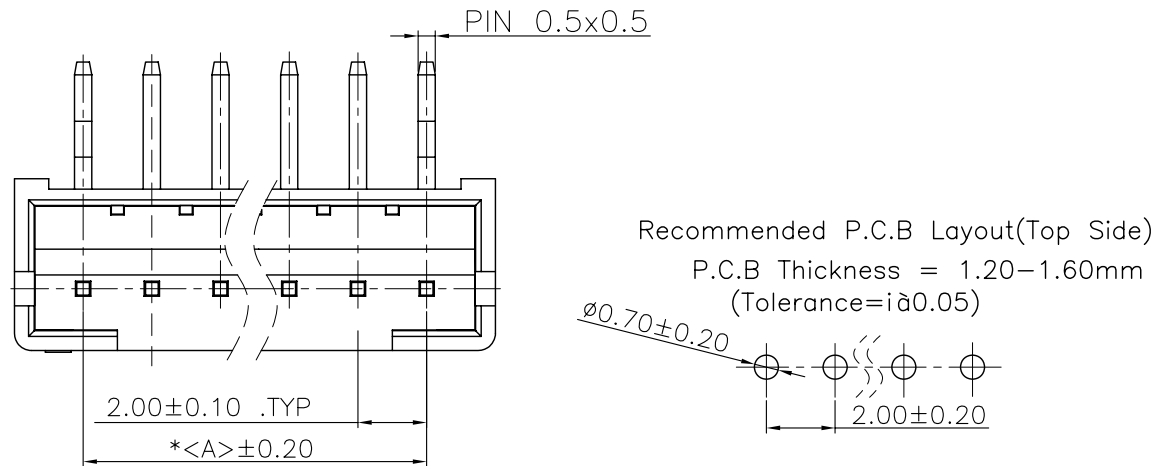

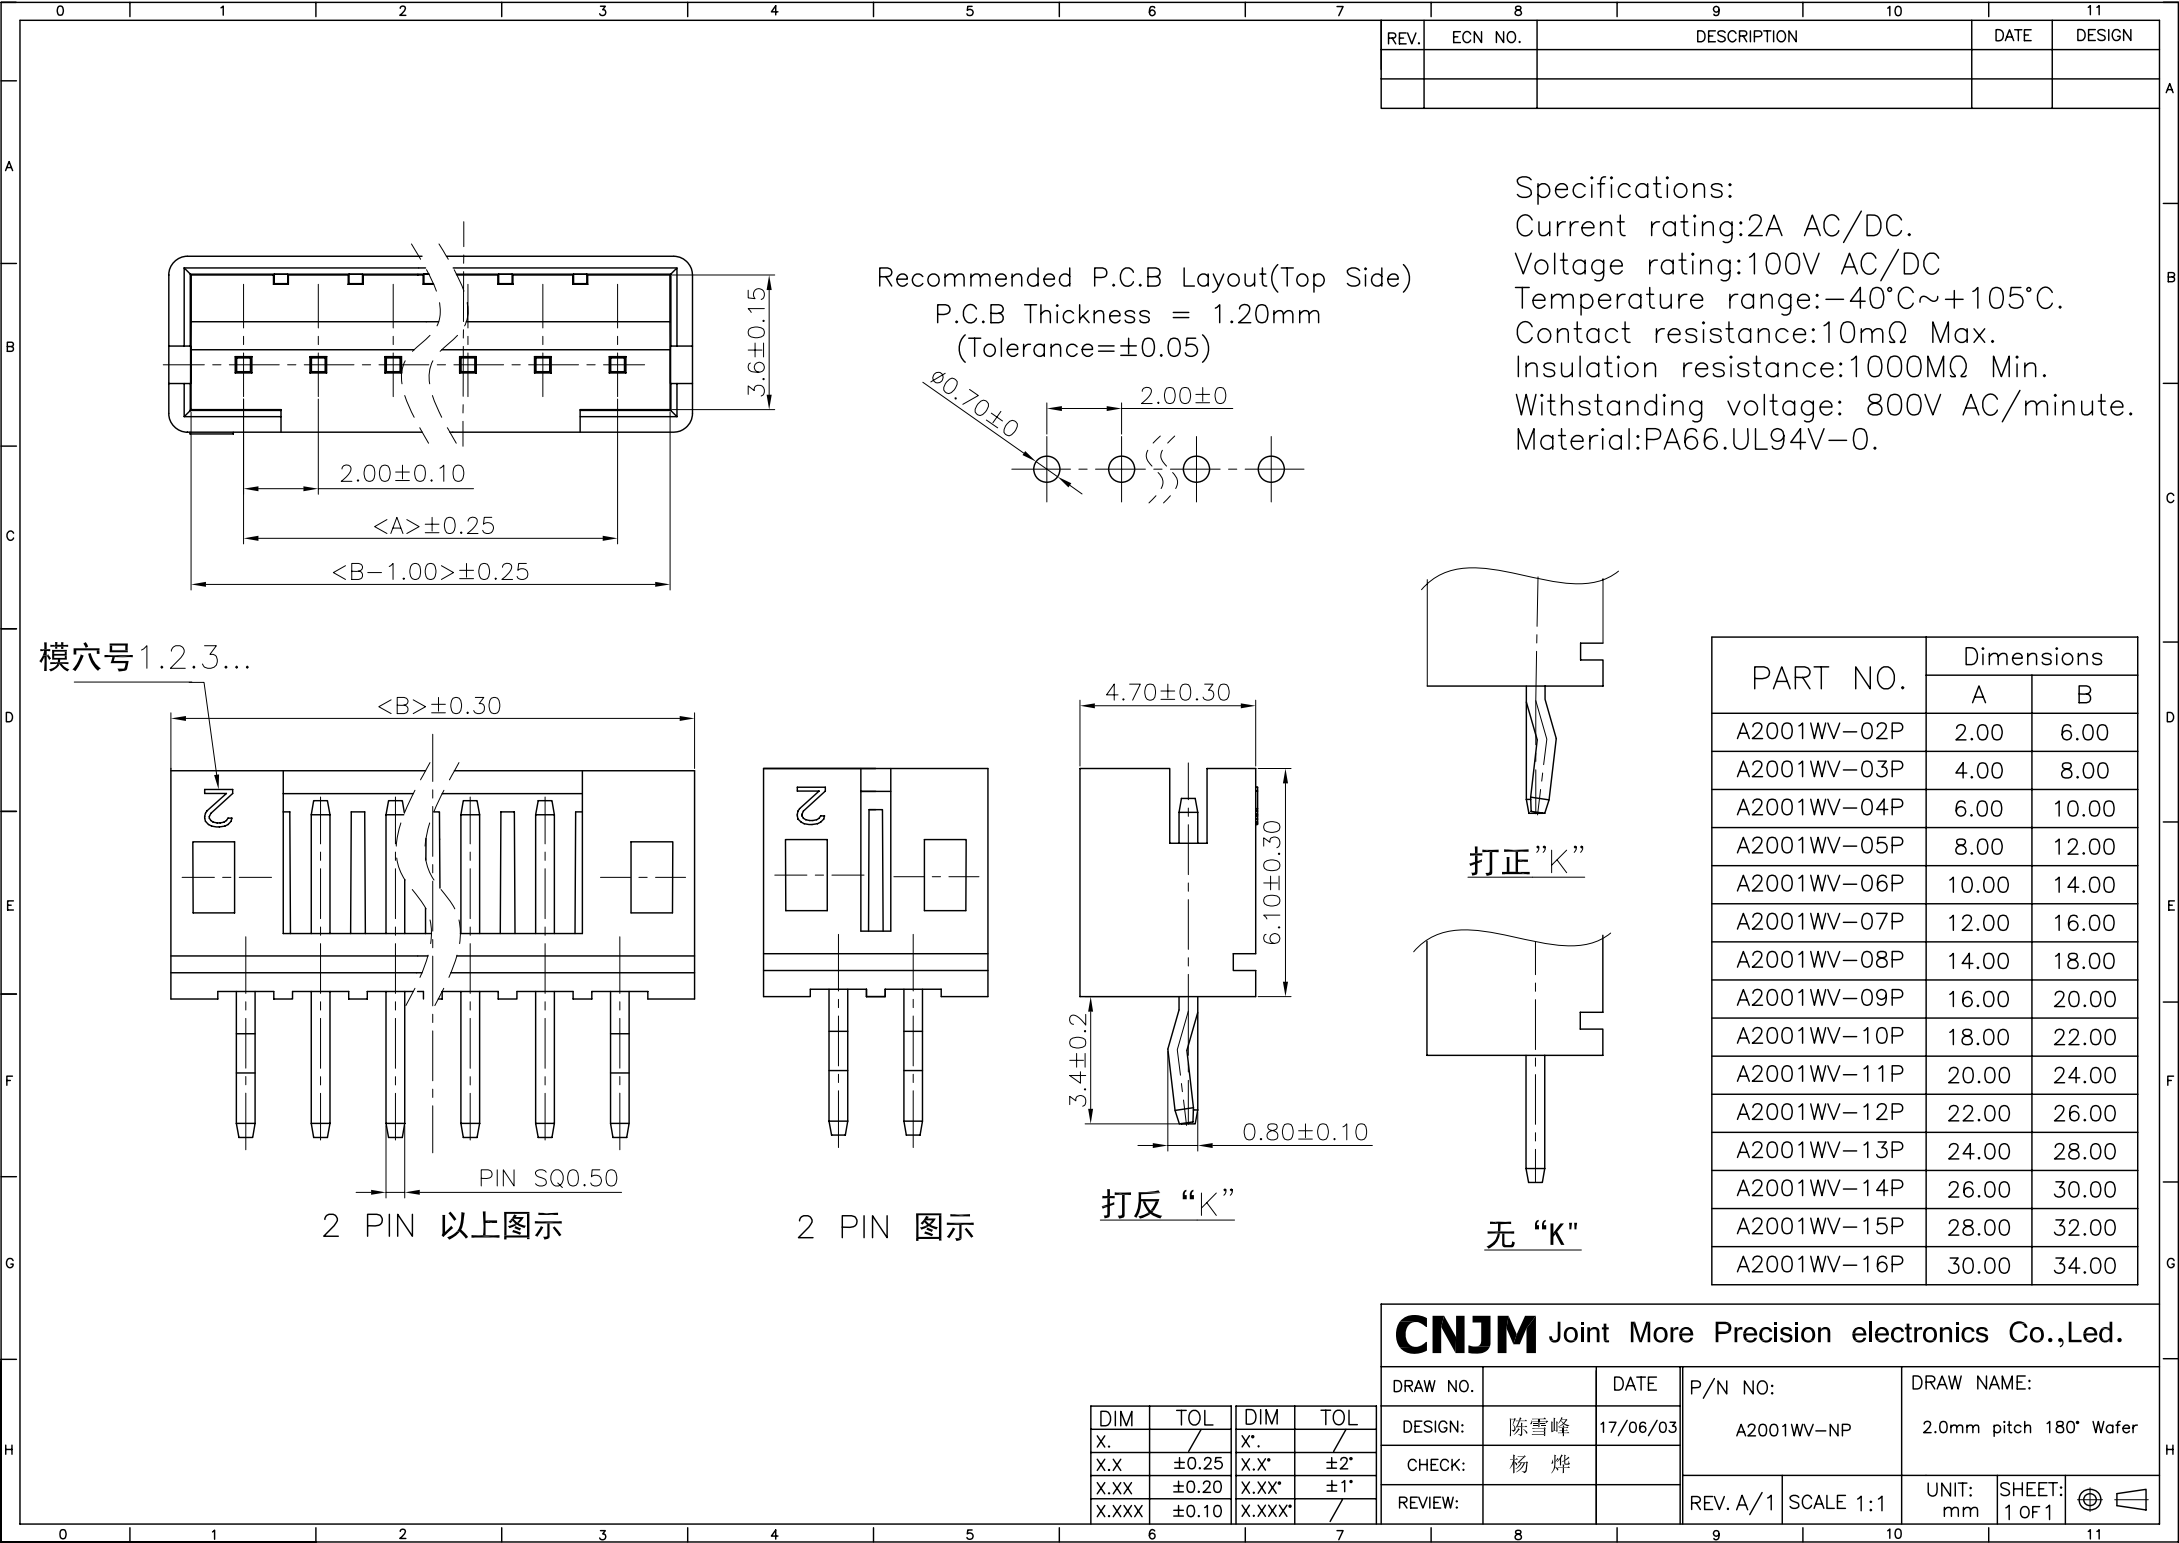

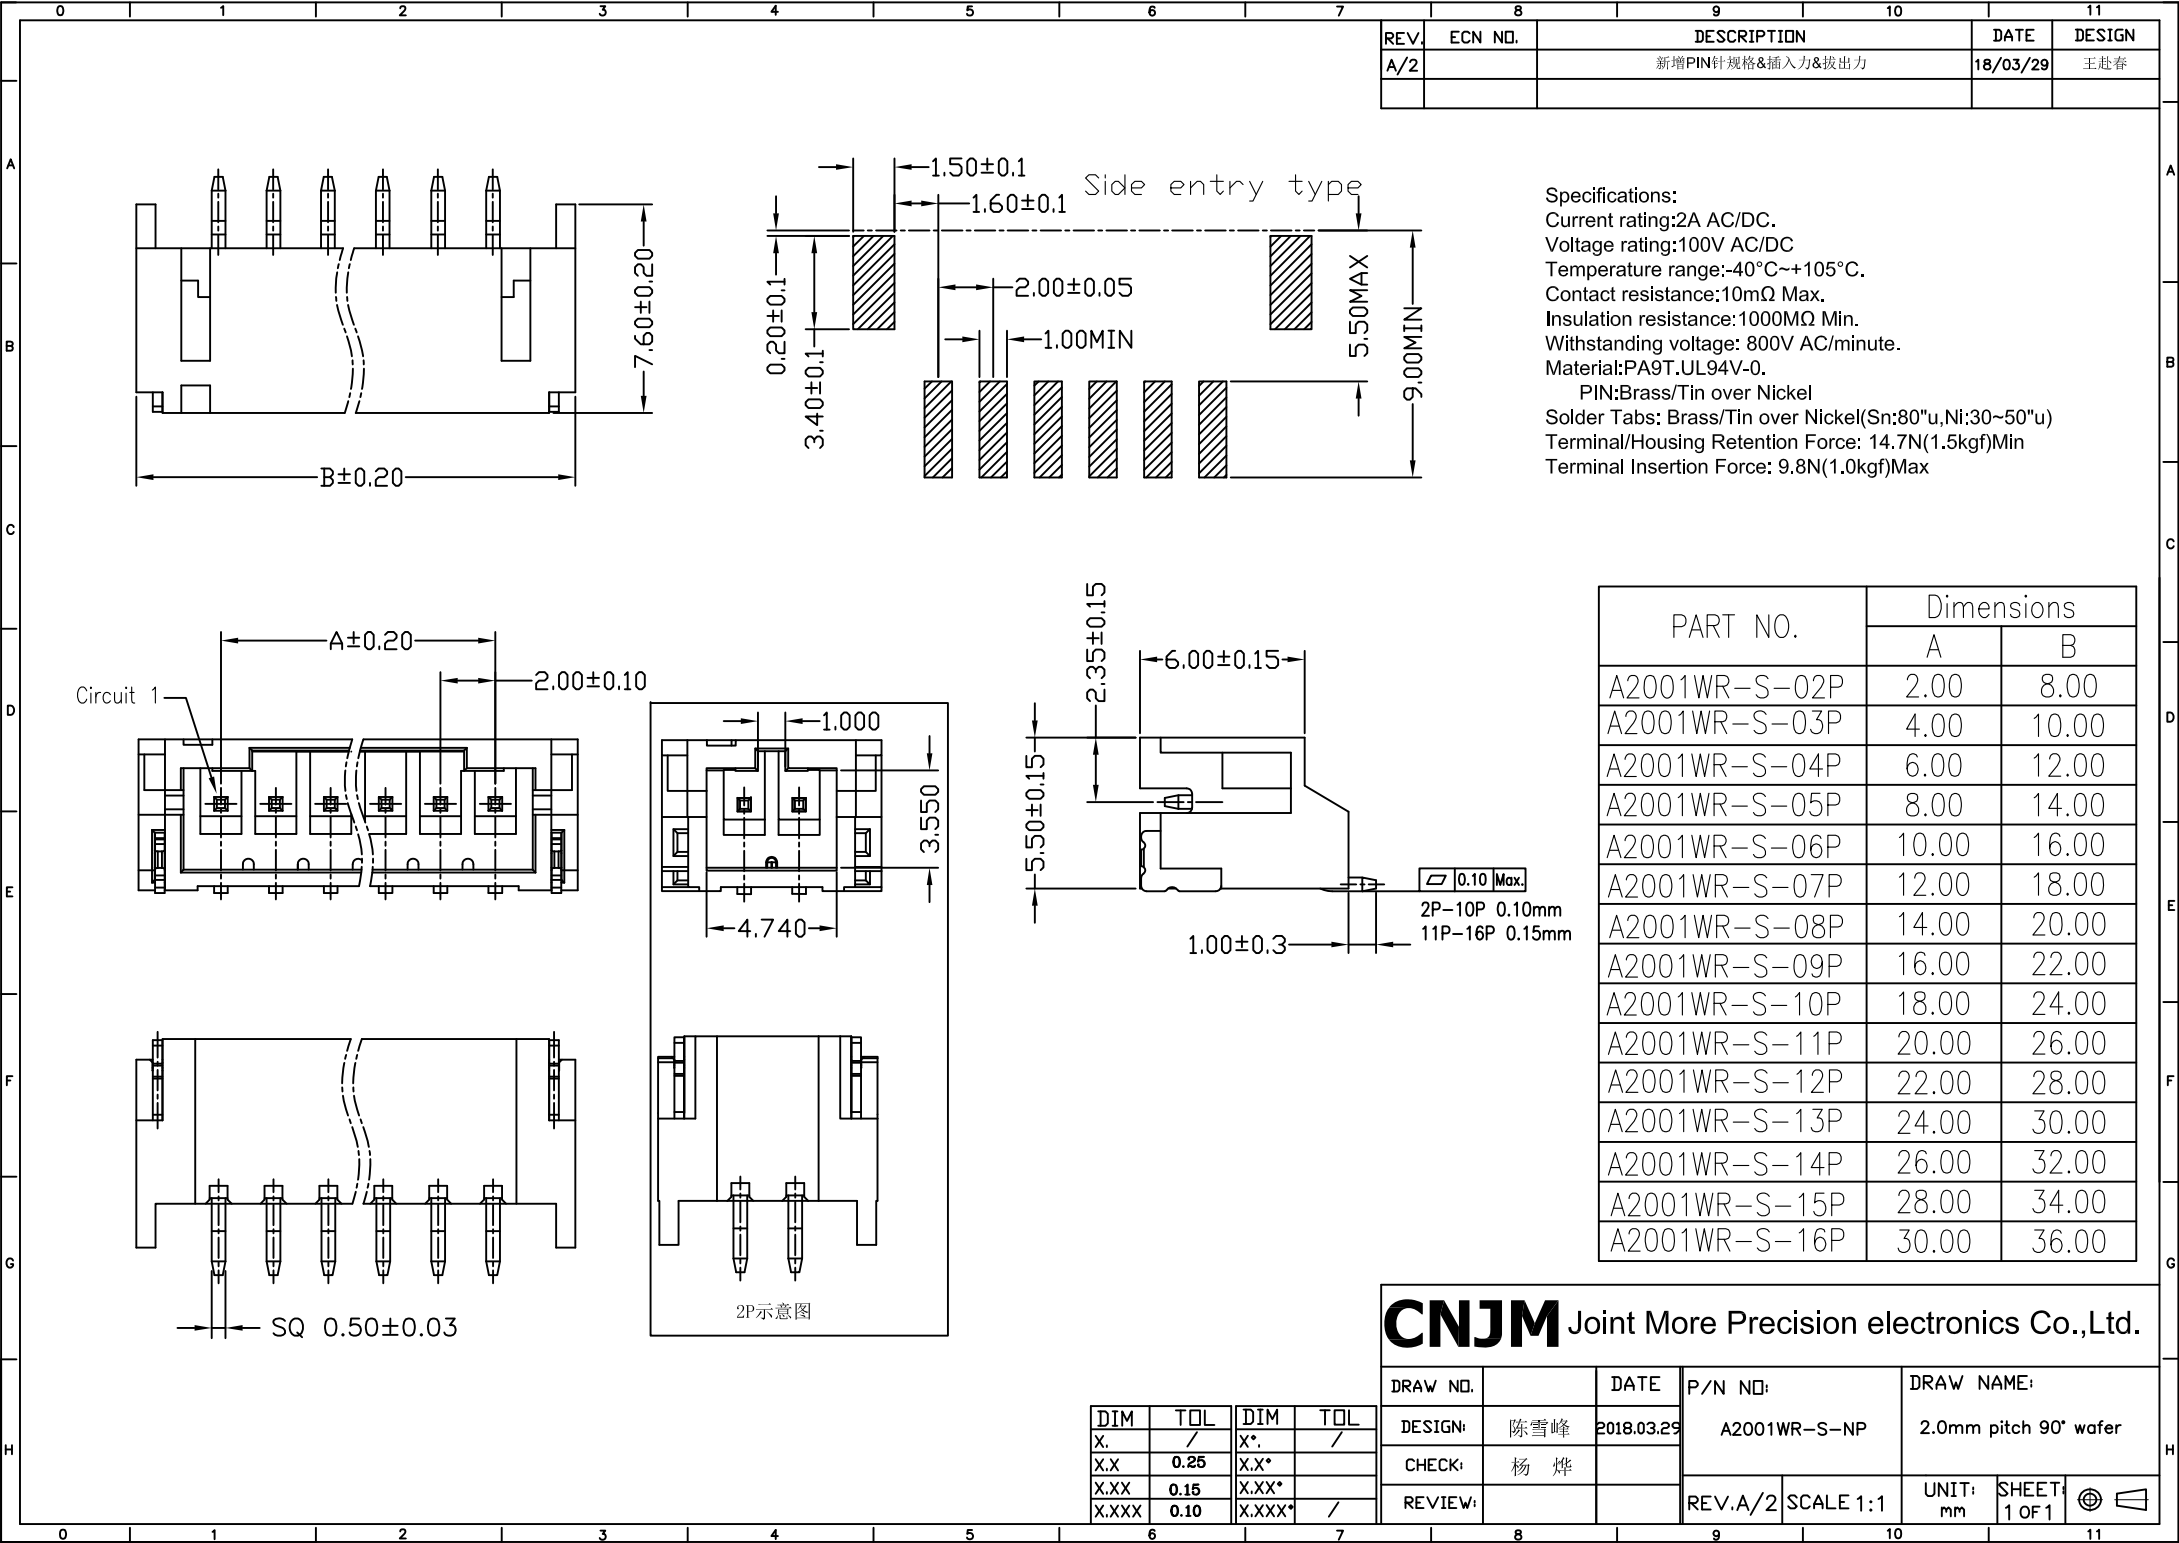


REV	ECN NO.	DESCRIPTION	DATE	DESIGN
A/2		新增PIN针规格&插入力&拔出力	18/03/29	王赴春

Specifications:
Current rating:2A AC/DC.
Voltage rating:100V AC/DC
Temperature range:-40°C~+105°C.
Contact resistance:10mΩ Max.
Insulation resistance:1000MΩ Min.
Withstanding voltage: 800V AC/minute.
Material:PA9T.UL94V-0.
PIN:Brass/Tin over Nickel
Solder Tabs: Brass/Tin over Nickel(Sn:80%u,Ni:30~50%u)
Terminal/Housing Retention Force: 14.7N(1.5kgf)Min
Terminal Insertion Force: 9.8N(1.0kgf)Max







PART NO.	Dimensions	
	A	B
A2001WR-S-02P	2.00	8.00
A2001WR-S-03P	4.00	10.00
A2001WR-S-04P	6.00	12.00
A2001WR-S-05P	8.00	14.00
A2001WR-S-06P	10.00	16.00
A2001WR-S-07P	12.00	18.00
A2001WR-S-08P	14.00	20.00
A2001WR-S-09P	16.00	22.00
A2001WR-S-10P	18.00	24.00
A2001WR-S-11P	20.00	26.00
A2001WR-S-12P	22.00	28.00
A2001WR-S-13P	24.00	30.00
A2001WR-S-14P	26.00	32.00
A2001WR-S-15P	28.00	34.00
A2001WR-S-16P	30.00	36.00

CNJM Joint More Precision electronics Co.,Ltd.					
DRAW NO.		DATE	P/N NO:	DRAW NAME:	
DESIGN:	陈雪峰	2018.03.29	A2001WR-S-NP	2.0mm pitch 90° wafer	
CHECK:	杨 烨				
REVIEW:			REV.A/2	SCALE 1:1	UNIT: mm
					SHEET 1 OF 1
					⊕

DIM	TOL	DIM	TOL
X.	/	X*.	/
X.X	0.25	X.X*	
X.XX	0.15	X.XX*	
X.XXX	0.10	X.XXX*	/

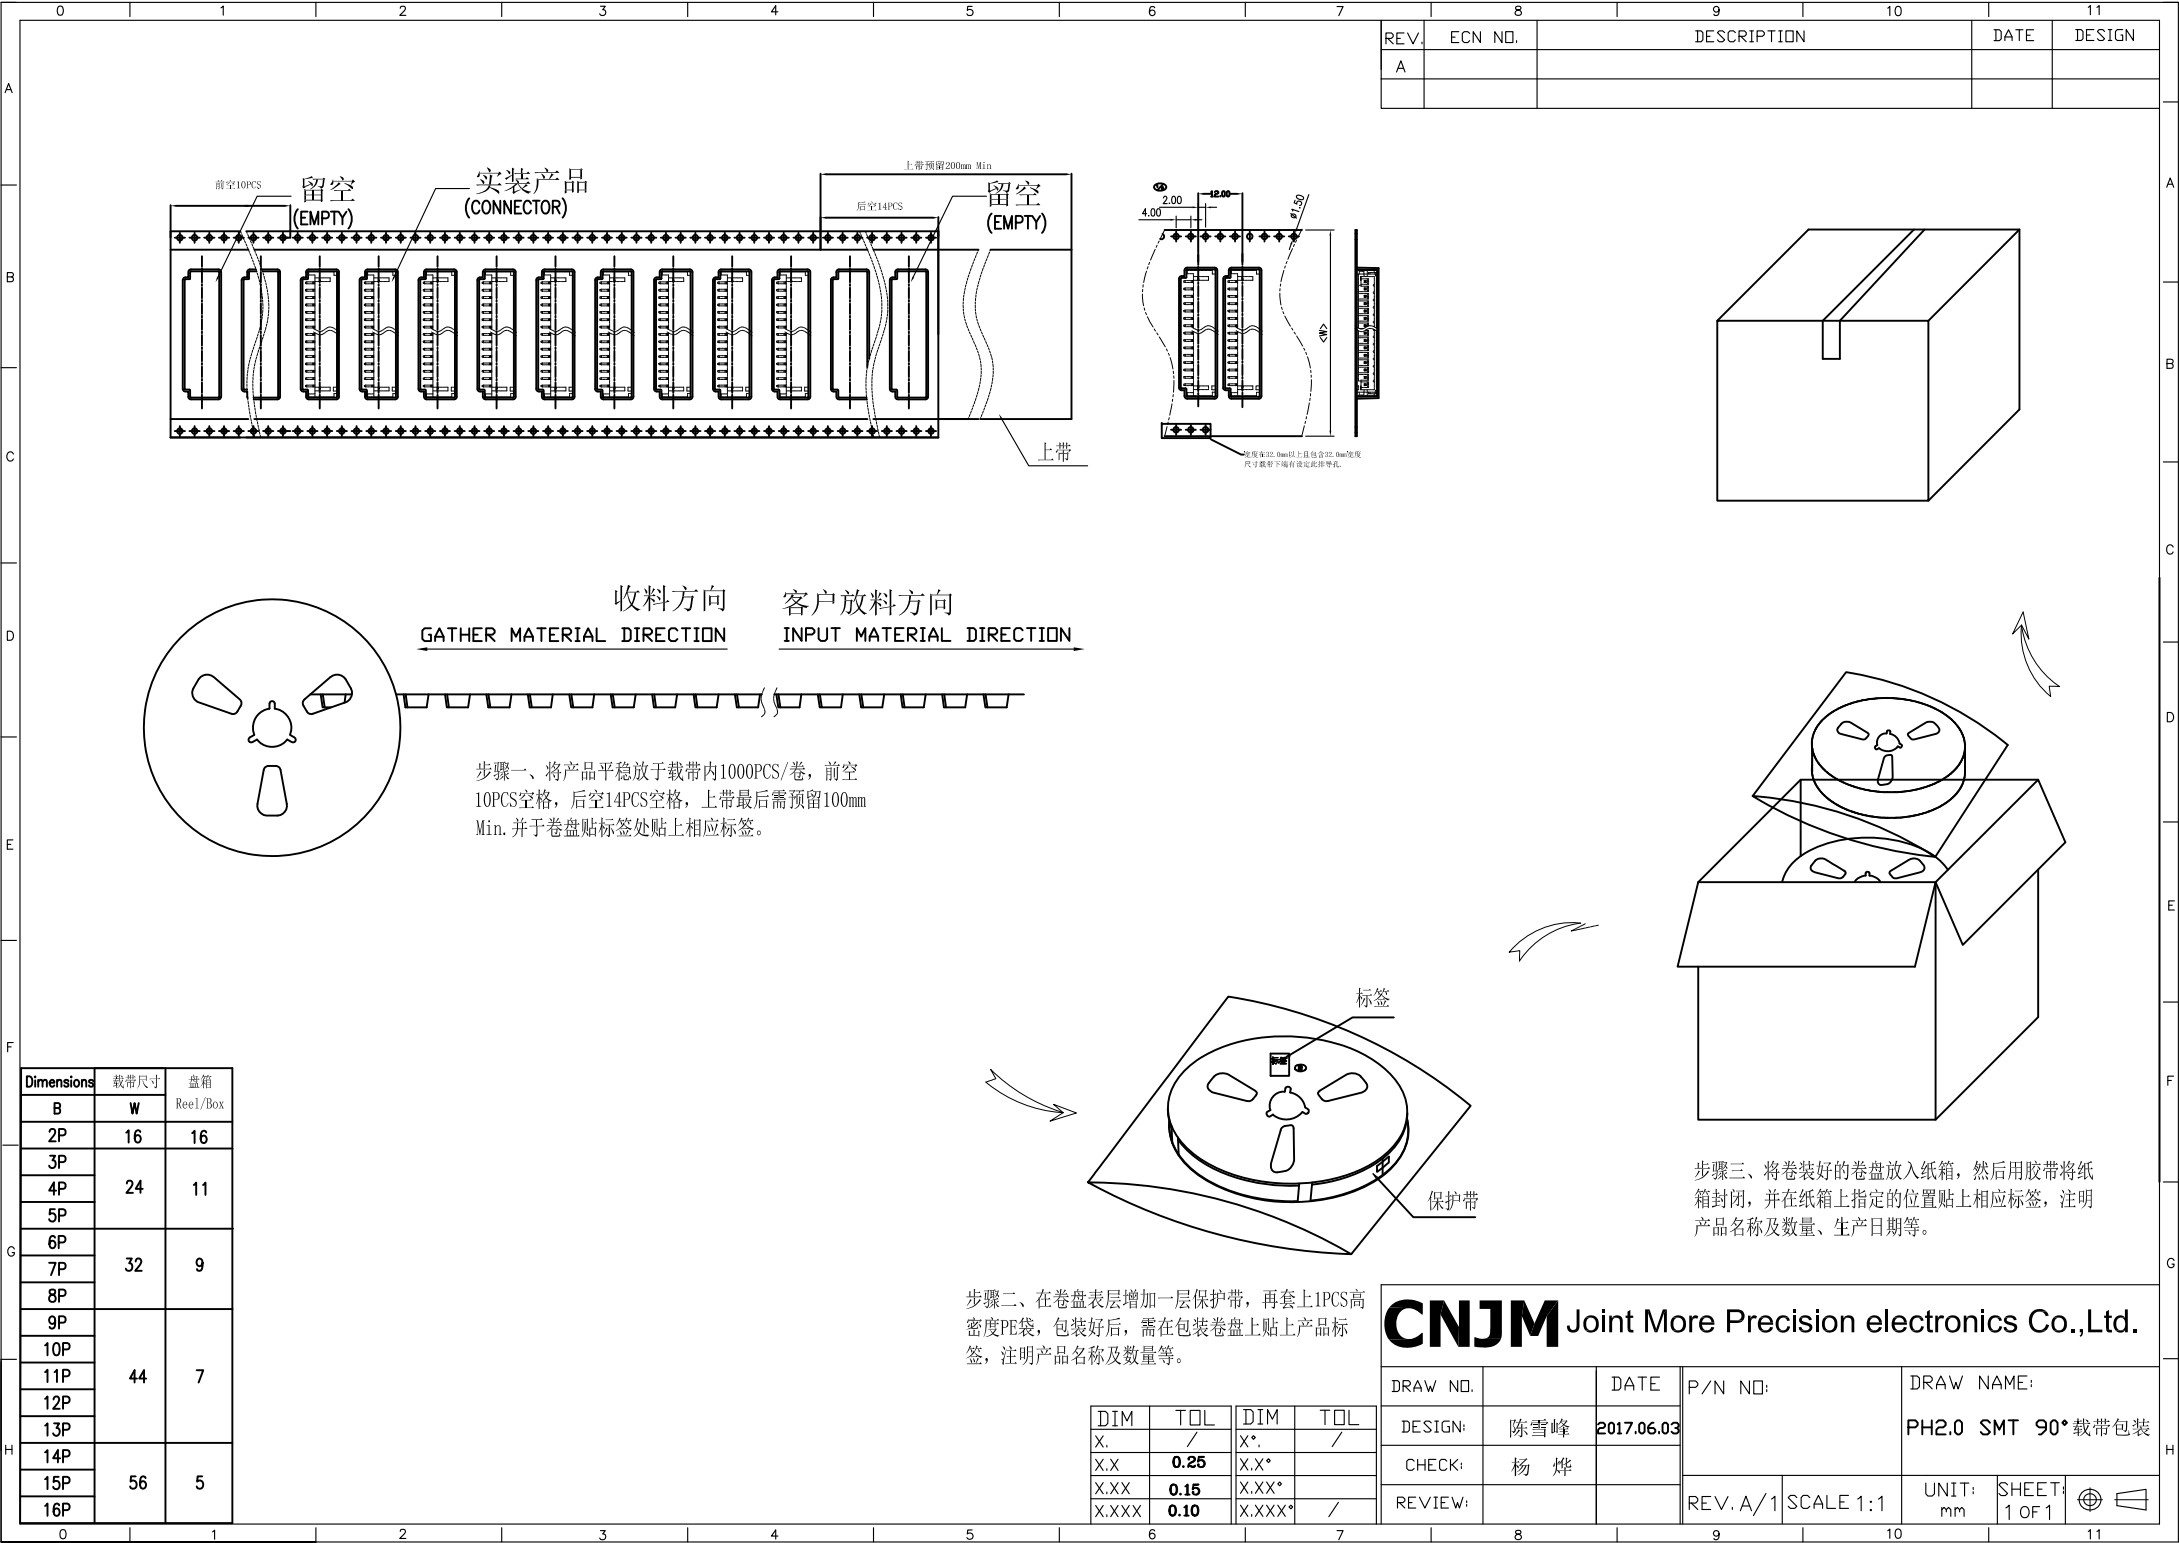

REV	ECN NO.	DESCRIPTION	DATE	DESIGN
A				

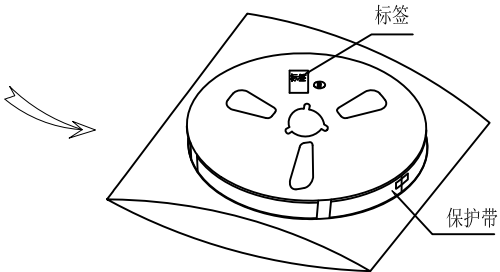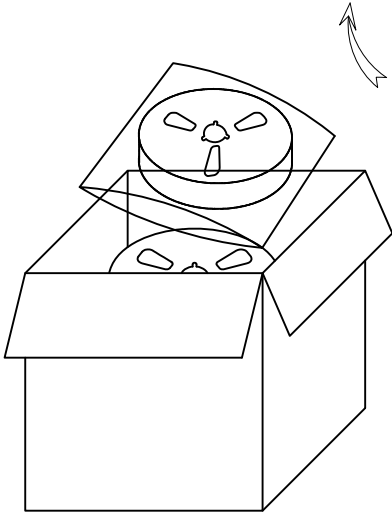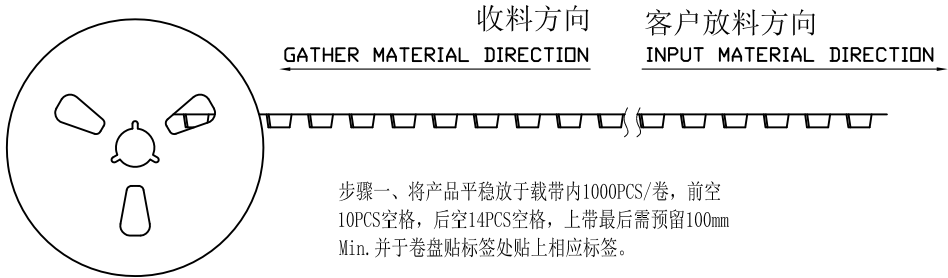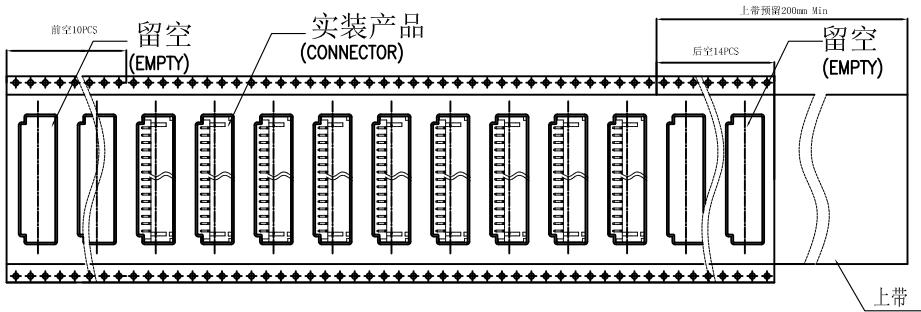



步骤三、将卷装好的卷盘放入纸箱，然后用胶带将纸箱封闭，并在纸箱上指定的位置贴上相应标签，注明产品名称及数量、生产日期等。

Dimensions	载带尺寸	盘箱
B	W	Reel/Box
2P	16	16
3P	24	11
4P		
5P		
6P	32	9
7P		
8P		
9P	44	7
10P		
11P		
12P	56	5
13P		
14P		
15P		
16P		





步骤二、在卷盘表层增加一层保护带，再套上1PCS高密度PE袋，包装好后，需在包装卷盘上贴上产品标签，注明产品名称及数量等。

DIM	TOL	DIM	TOL
X.	/	X°.	/
X.X	0.25	X.X°	
X.XX	0.15	X.XX°	
X.XXX	0.10	X.XXX°	/

CNJM Joint More Precision electronics Co.,Ltd.					
DRAW NO.		DATE	P/N NO:	DRAW NAME:	
DESIGN:	陈雪峰	2017.06.03		PH2.0 SMT 90°载带包装	
CHECK:	杨 烨				
REVIEW:			REV. A/1	SCALE 1:1	UNIT: mm
				SHEET: 1 OF 1	

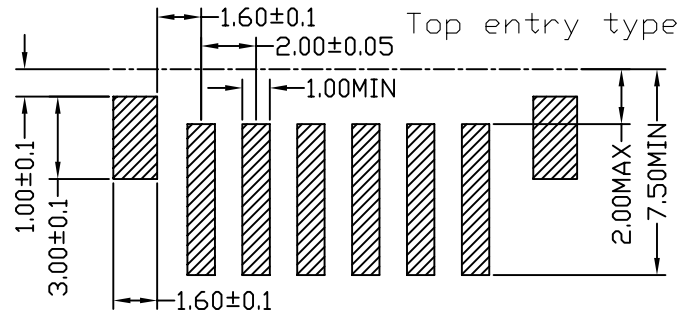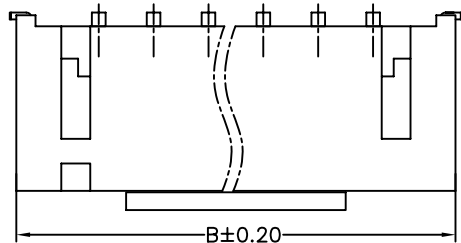

Specifications:
Current rating:2A AC/DC.
Voltage rating:100V AC/DC
Temperature range:-40°C~+105°C.
Contact resistance:10MΩ Max.
Insulation resistance:1000MΩ Min.
Withstanding voltage: 800V AC/minute.
Material:PA9T/LCP.UL94V-0.
PIN:Brass 0.5*10.00

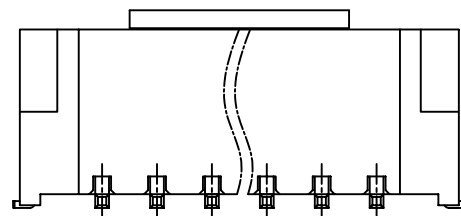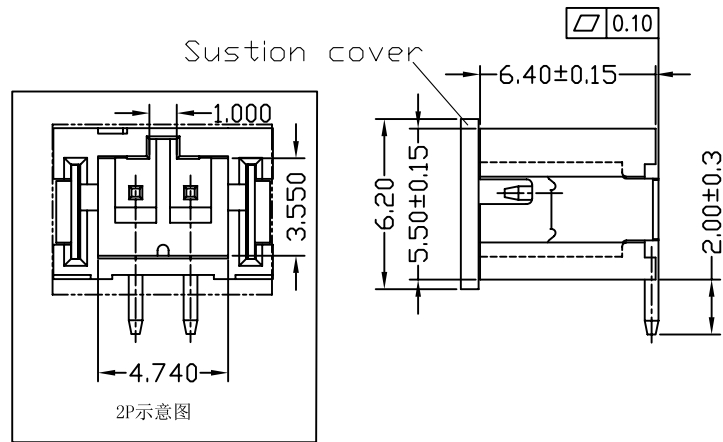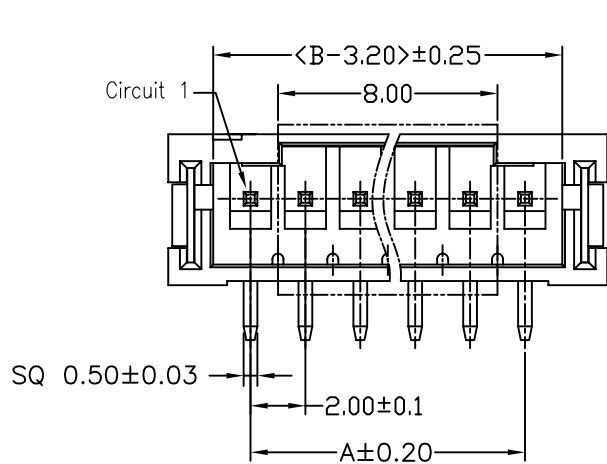

PART NO.	Dimensions	
	A	B
A2001WV-S-02P	2.00	8.00
A2001WV-S-03P	4.00	10.00
A2001WV-S-04P	6.00	12.00
A2001WV-S-05P	8.00	14.00
A2001WV-S-06P	10.00	16.00
A2001WV-S-07P	12.00	18.00
A2001WV-S-08P	14.00	20.00
A2001WV-S-09P	16.00	22.00
A2001WV-S-10P	18.00	24.00
A2001WV-S-11P	20.00	26.00
A2001WV-S-12P	22.00	28.00
A2001WV-S-13P	24.00	30.00
A2001WV-S-14P	26.00	32.00
A2001WV-S-15P	28.00	34.00
A2001WV-S-16P	30.00	36.00

CNJM Joint More Precision electronics Co.,Ltd.

DRAW NO.	DATE	P/N NO.	DRAW NAME
DESIGN: 陈雪峰	2018.03.29	A2001WV-S-NP	2.0mm pitch 180° wafer
CHECK: 杨 烨			
REVIEW:		REV.A/1	SCALE 1:1
		UNIT: mm	SHEET: 1 OF 1

DIM	TOL	DIM	TOL
X.	/	X*	/
X.X	0.25	X.X*	
X.XX	0.15	X.XX*	
X.XXX	0.10	X.XXX*	/

